


Symbio R454B 2 Speed/CV AHU with Electromechanical or Residential Heat Pump Condenser(s)

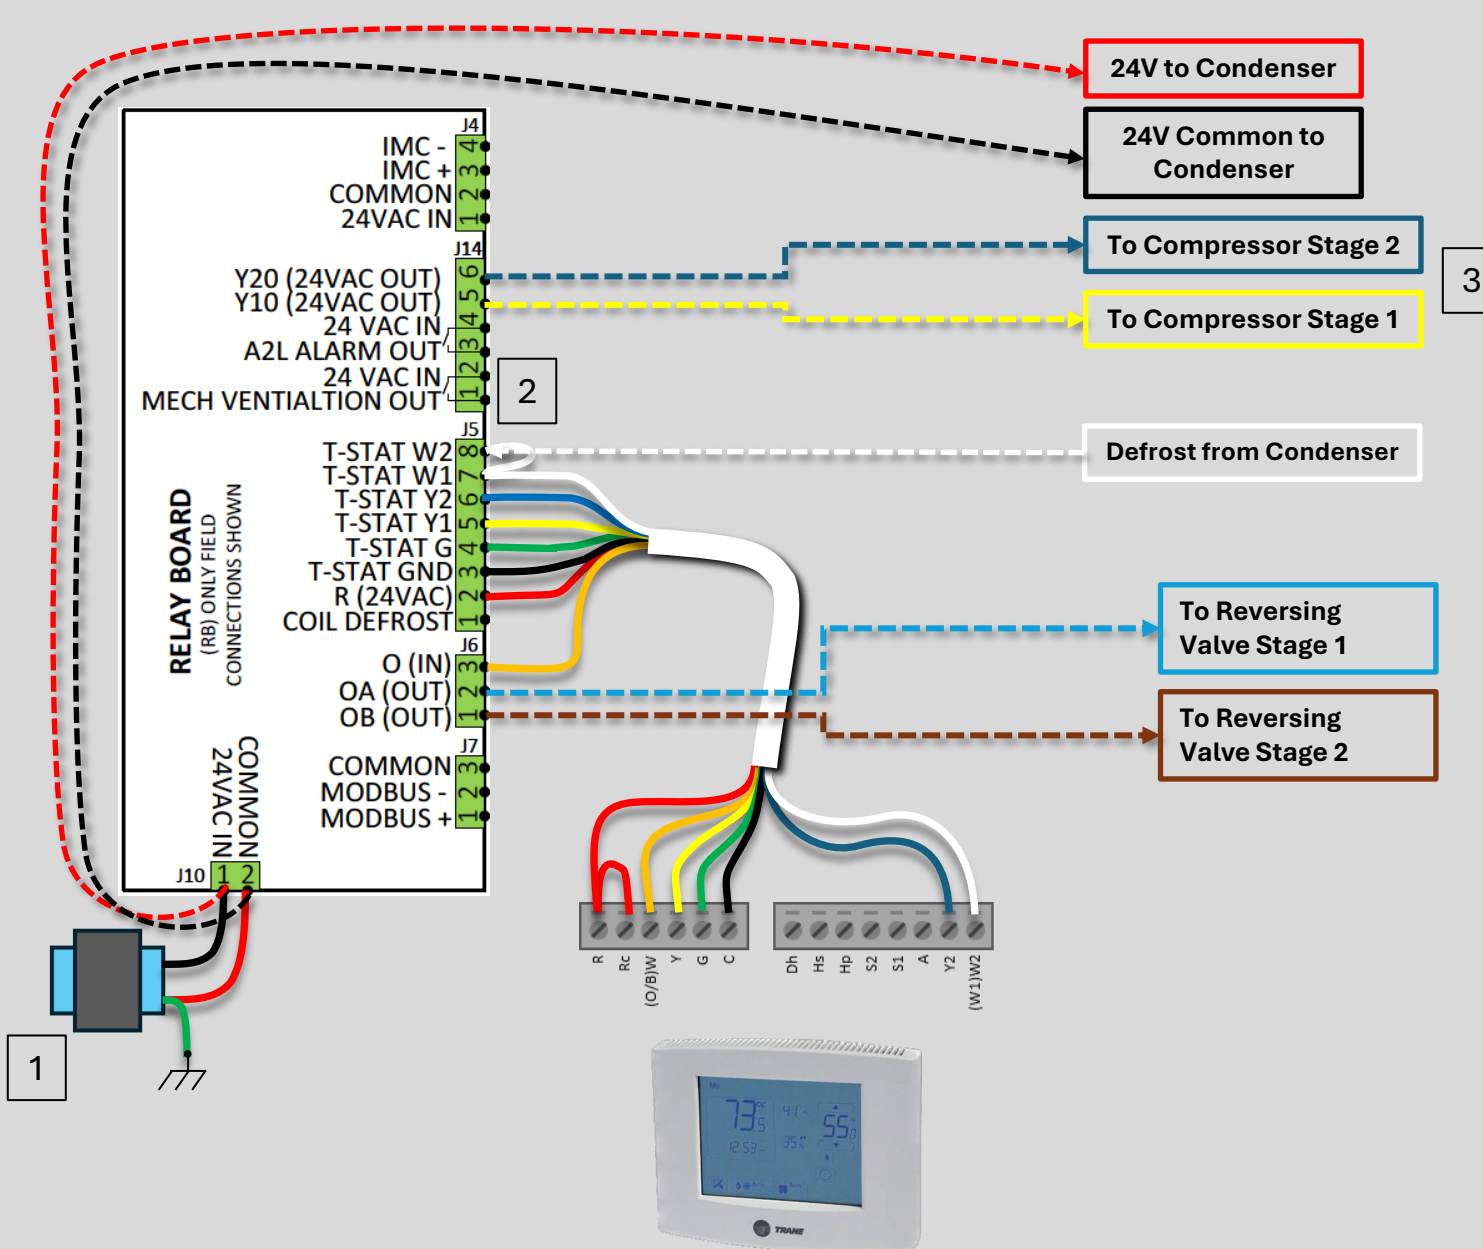

- 1 Transformer factory installed on 5 ton air handler. All other air handlers will need a field installed transformer kit. See Product Catalog for kit part numbers.
- 2 Use Mechanical Ventilation Output contacts (N.O.) to enable external ventilation system when required by the application. (Contact Rating: 24VAC/VDC, 2A).
- 3 Isolation relays may be necessary if the condenser(s) have their own transformer.