


REPLACES	AUTOCAD	2311-3295	REV
	TRAITS		B
REVISION DATE	THE DESIGN IS PROPERTY AND	CONNECTION DIAGRAM	
08/06/2014	CONTROLLED BY THE USER.	VARIABLE SPEED	
DRAWN BY	ALL RIGHTS RESERVED. NO PARTS	W/VM30	
MS HERZOG	OR REPRODUCED WITHOUT	VSH 024-060 & VSV 060	
DATE	SIMILAR TO		
08/05/14			

⚠ WARNING
HAZARDOUS VOLTAGE!
 DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS BEFORE SERVICING.
 FAILURE TO DISCONNECT POWER BEFORE SERVICING CAN CAUSE SEVERE PERSONAL INJURY OR DEATH.

CAUTION
 USE COPPER CONDUCTORS ONLY! UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS.
 FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT.

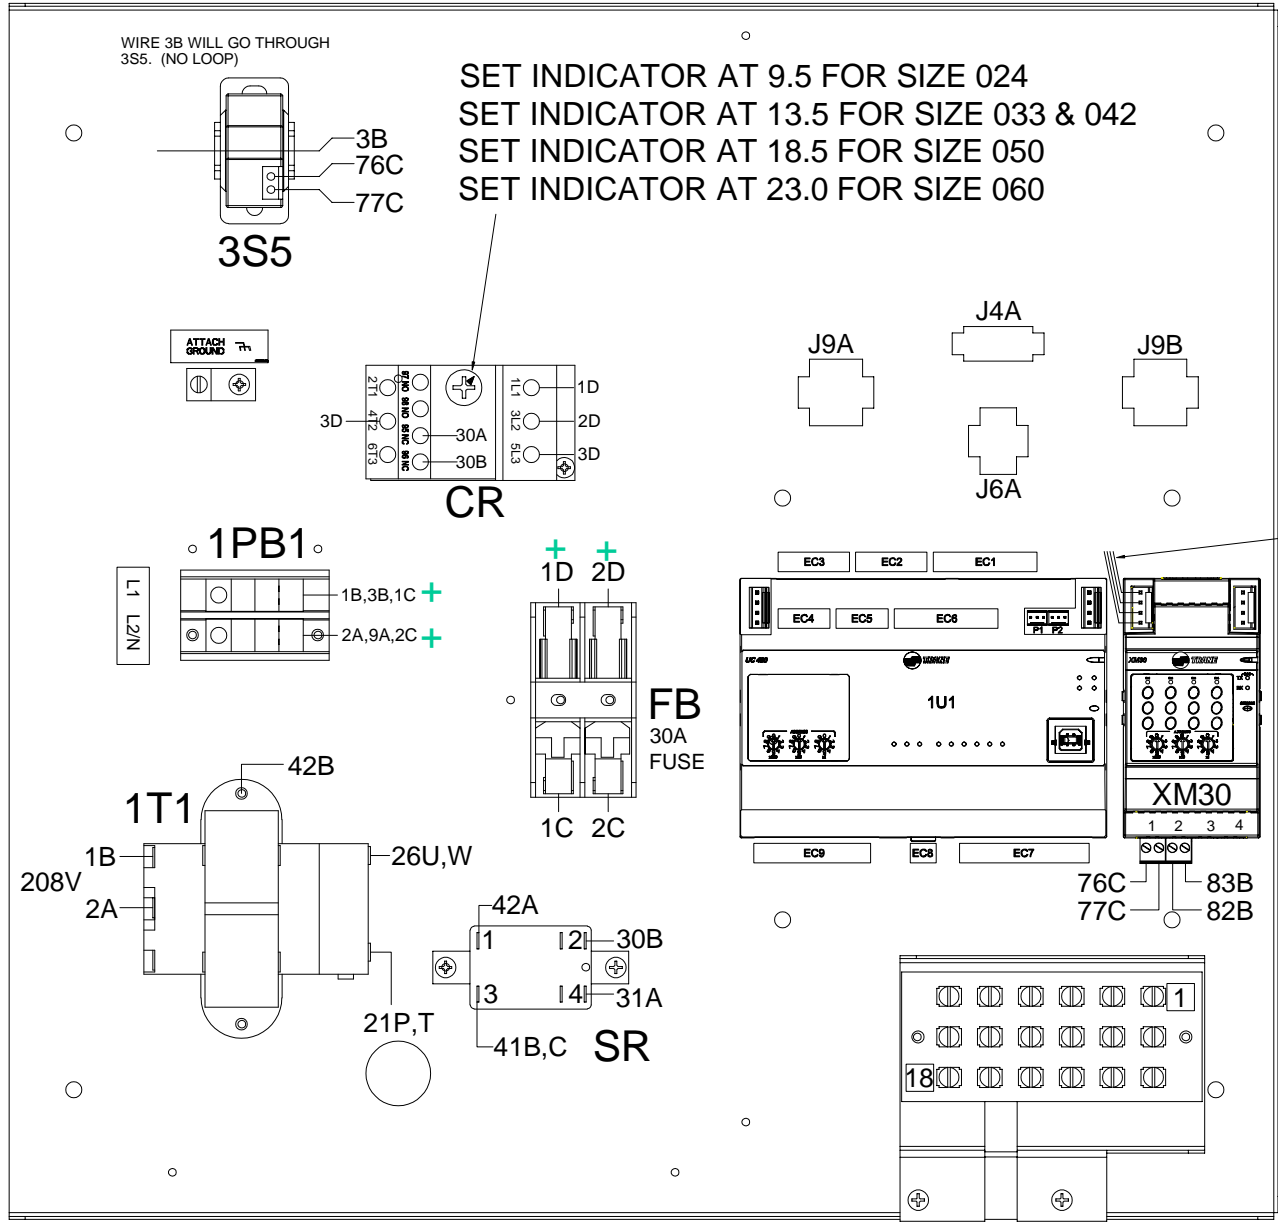

SET INDICATOR AT 9.5 FOR SIZE 024
 SET INDICATOR AT 13.5 FOR SIZE 033 & 042
 SET INDICATOR AT 18.5 FOR SIZE 050
 SET INDICATOR AT 23.0 FOR SIZE 060

CONTROLS - ONLY CONNECT HARNESS TO XM30
 EOL WILL CONNECT THE OTHER END TO THE UC400