

TOLERANCE  
UNLESS OTHERWISE SPECIFIED

.X = ±  
.XX = ± .06  
.XXX = ±

FINISH ✓

ANGLES = ± ° HOLE DIA = ±  
CONFORMS TO ANSI Y14.5M-1982

AUTOCAD  
DO NOT SCALE  
PRINT

DRAWN BY:  
R.F.M.

DATE: 7-23-68

SIMILAR TO:

THE TRANE COMPANY  
A DIVISION OF  
AMERICAN STANDARD INC.

THIS DRAWING IS PROPRIETARY AND  
SHALL NOT BE COPIED OR ITS  
CONTENTS DISCLOSED TO OUTSIDE  
PARTIES WITHOUT THE WRITTEN  
CONSENT OF THE TRANE COMPANY

THIRD ANGLE  
PROJECTION

REV  
G

X10140064



PAD  
ISOLATION

SPECIFICATIONS:  
1. MAX LOADING CAPACITY: 50 PSI  
2. DEFLECTION: APPROX .06" AT 50 PSI

MATERIAL: NEOPRENE

COLOR: RED

EXT	PAD SIZE
00	18.00 X 18.00
01	6.00 X 6.00
02	18.00 X 36.00

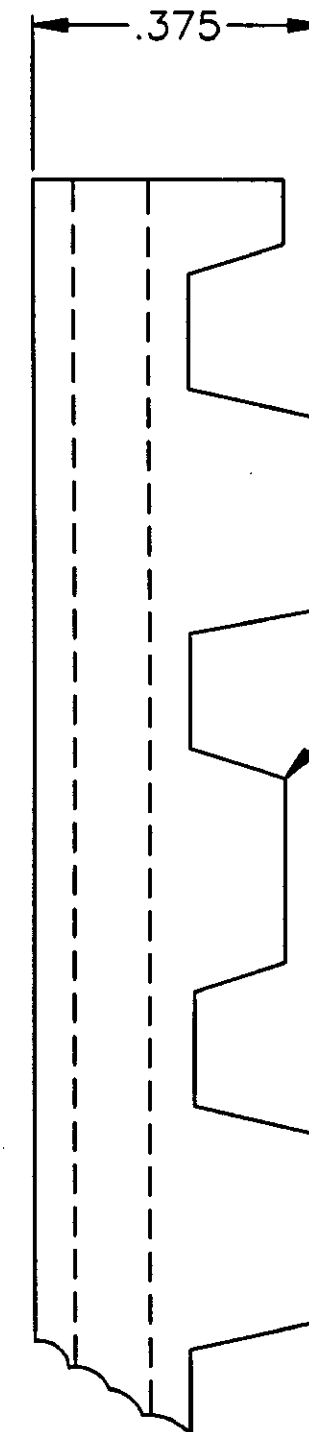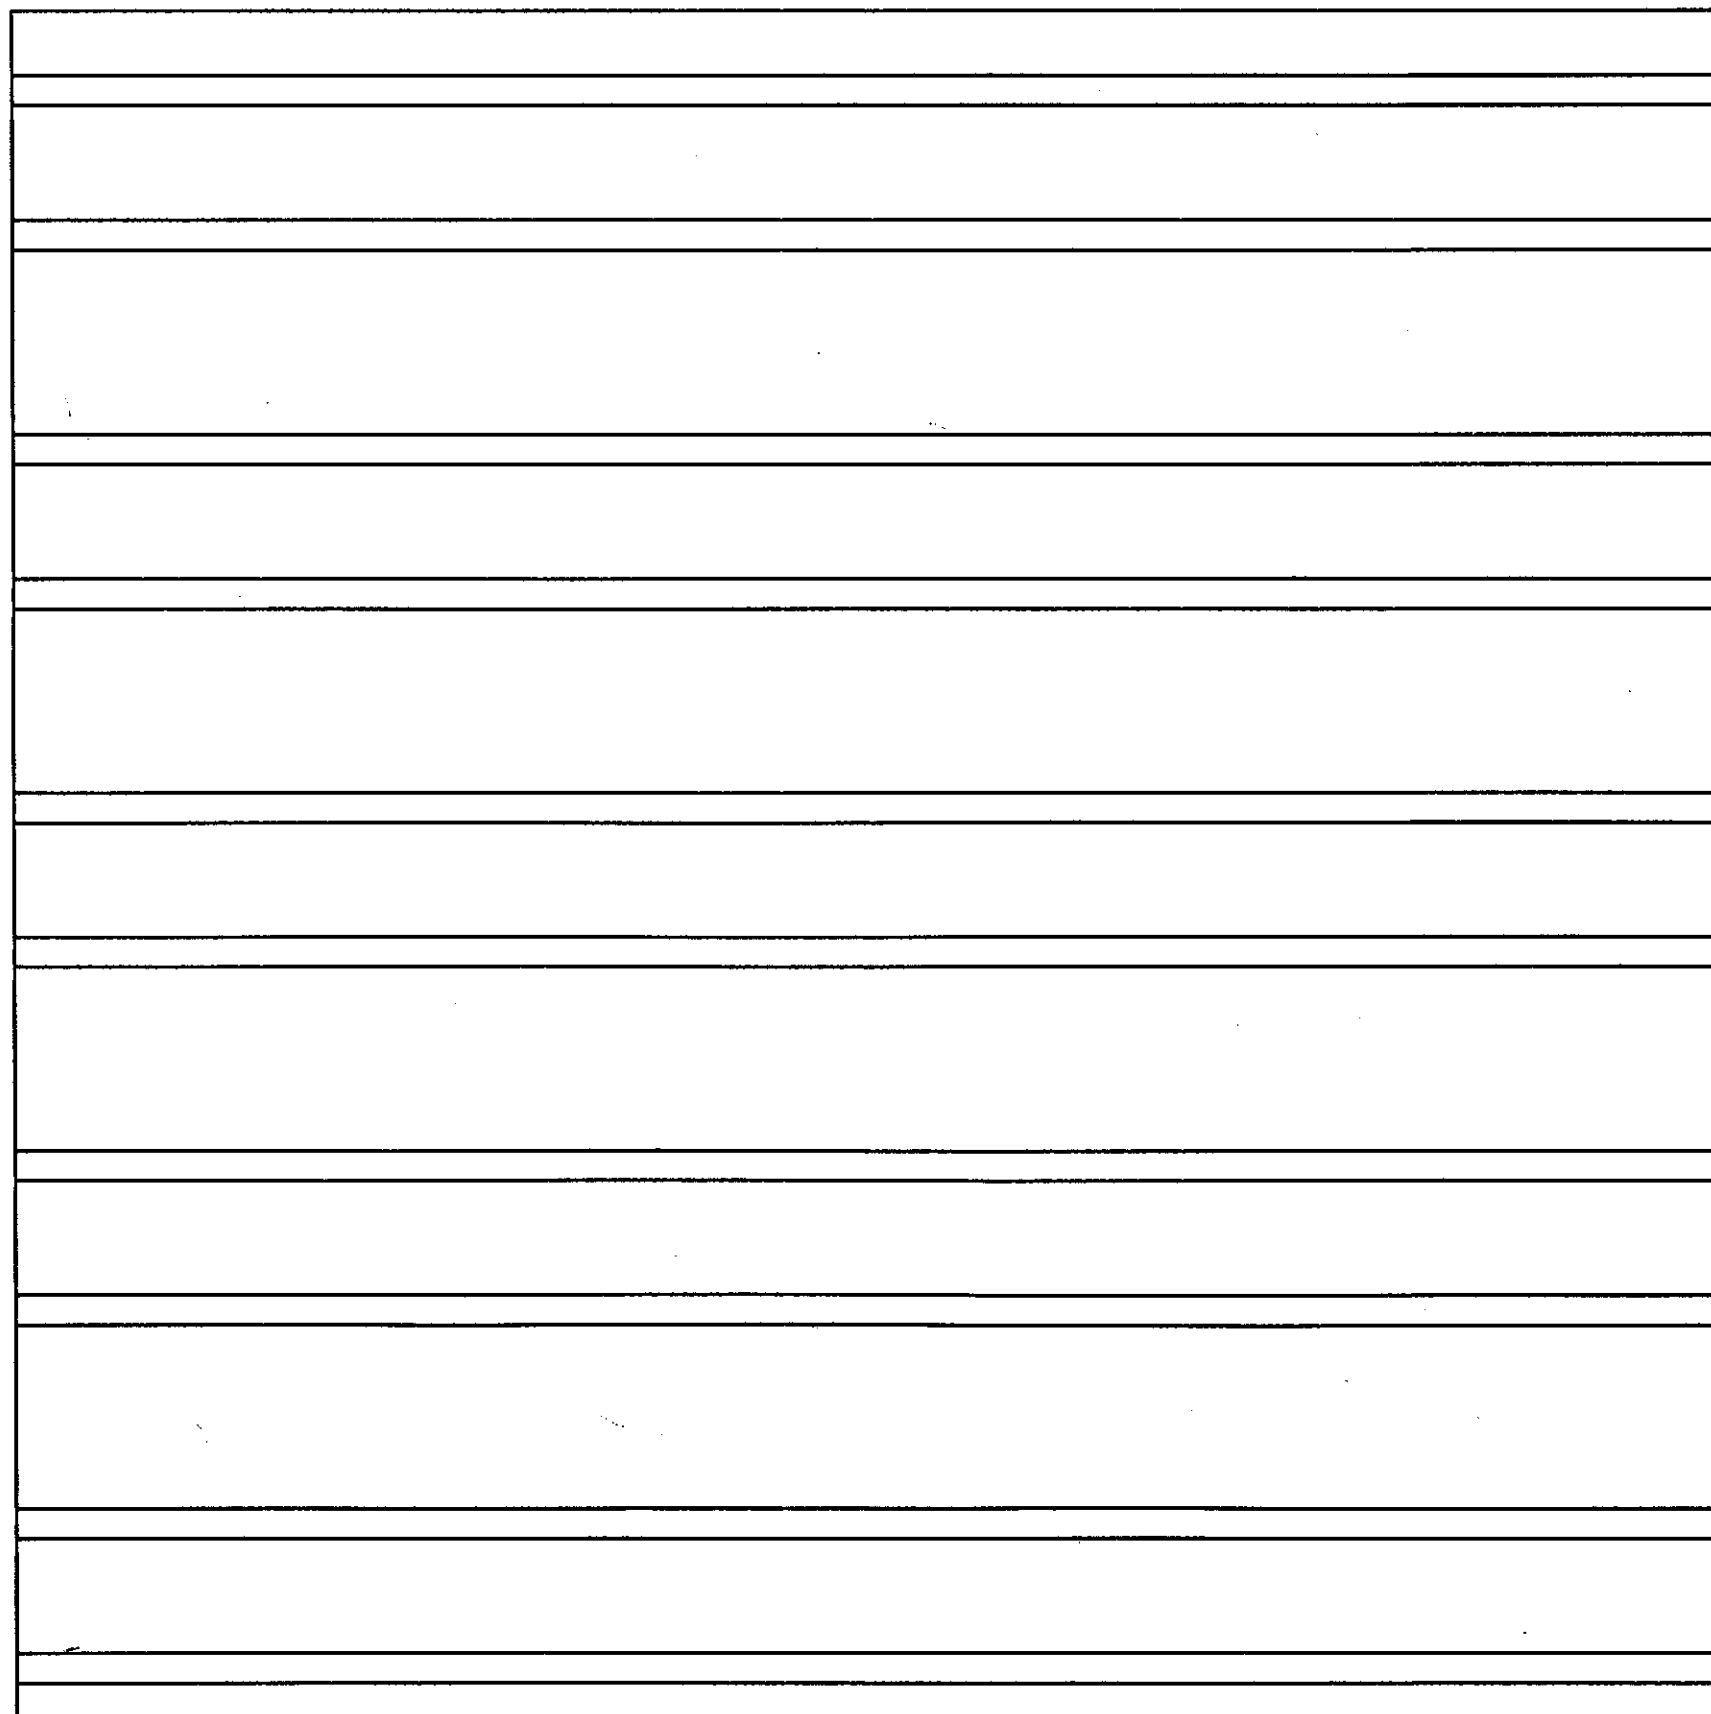

ALTERNATE HEIGHT RIBS TOP  
AND BOTTOM OF PAD RUNNING  
PERPENDICULAR TO EACH OTHER