

APPLIES TO:
VERTICAL UNIT VENT (VUV)

DAMPER ASSEMBLY


NOTE(S):
1. DAMPER ROD SCREW MUST BE TORQUED TO 75 ± 5 IN LBS.

DRAWING	REVISION	VERSION
	B	4

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCE:
.X ± 0.0
.XX ± 0.00
.XXX ± 0.000
ANGLES = ± 0.0 ° HOLE DIA = + -
CONFORMS TO ASME Y14.5M-1994.

TRANE
THIS DRAWING IS PROPRIETARY AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF TRANE.
DRAWN BY: Y. LI ©TRANE DATE: 20-AUG-2025
DO NOT SCALE PRINT THIRD ANGLE PROJECTION

S65380566 SHEET 1 OF 2 REV B
DESIGN INTENT
DAMPER ASSY & INSTL
VERTICAL UNIT VENT (VUV)

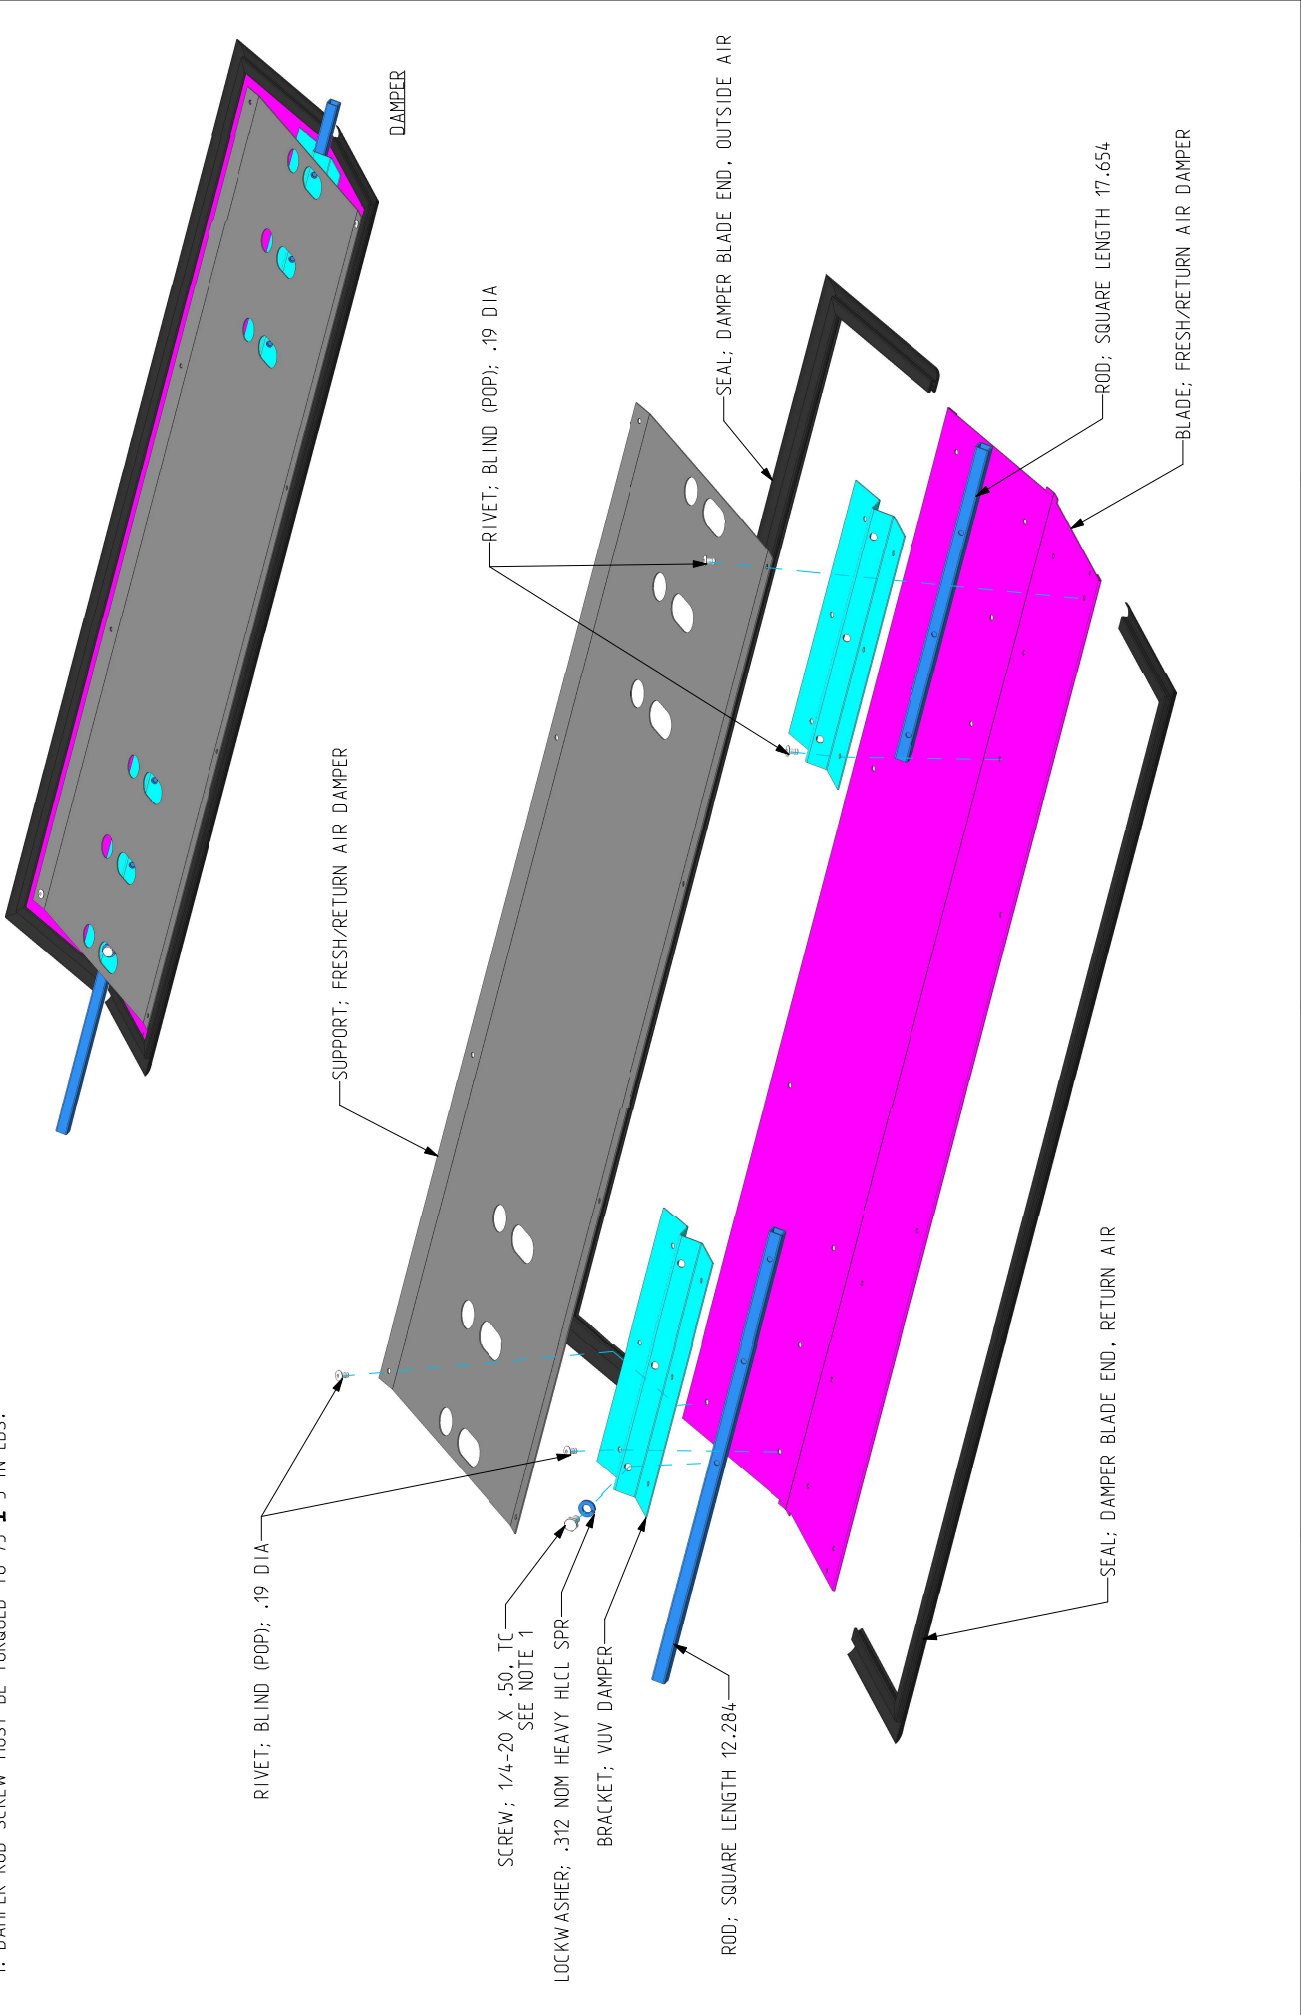

DRAWING	REVISION	VERSION
	B	4

TRANE

THIS DRAWING IS PROPRIETARY AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN CONSENT OF TRANE.
DRAWN BY: Y. LI
DATE: 20-AUG-2025
THIRD ANGLE PROJECTION

DO NOT SCALE PRINT

S65380566

SHEET
2 OF 2

REV
B

DESIGN INTENT

DAMPER ASSY & INSTL

VERTICAL UNIT VENT (VUV)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCE:

.X ± 0.0

.XX ± 0.00

.XXX ± 0.000

ANGLES = ± 0.0 °

HOLE DIA = ±

CONFORMS TO ASME Y14.5M-1994.

FINISH

✓

DAMPER INSTL

NOTE(S):
1. UNIT SIZE 750 DAMPER BLADE DEMONSTRATED AMCA CLASS 2 PERFORMANCE.
UNIT SIZE 1500 DAMPER BLADE DEMONSTRATES AMCA CLASS 3 PERFORMANCE LAX108271.

